FIG. 1

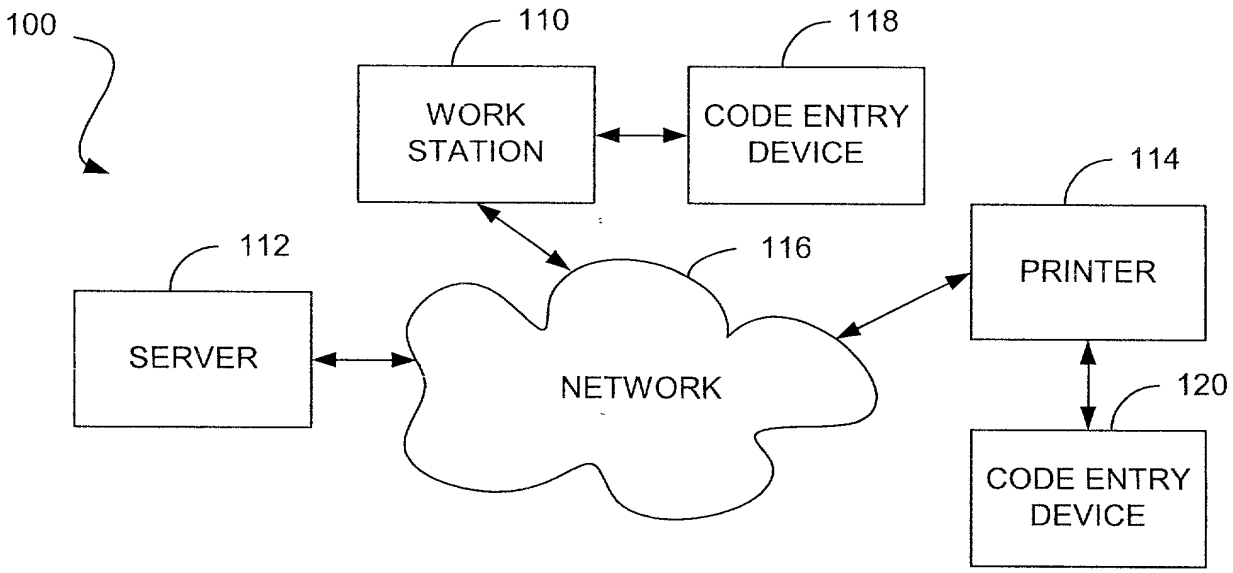

100
110
WORK STATION
118
CODE ENTRY DEVICE
114
PRINTER
112
SERVER
116
NETWORK
120
CODE ENTRY DEVICE

FIG. 2

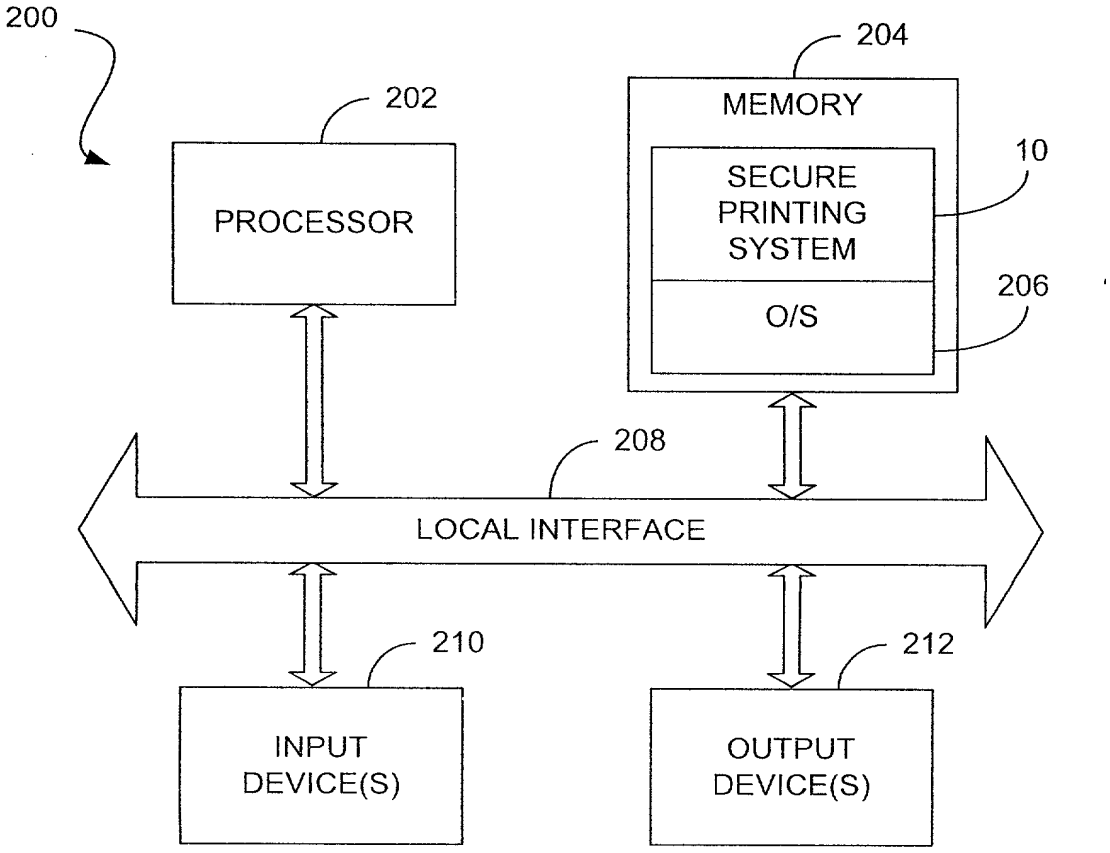

200
204
MEMORY
202
PROCESSOR
SECURE PRINTING SYSTEM
10
O/S
206
208
LOCAL INTERFACE
210
212
INPUT DEVICE(S)
OUTPUT DEVICE(S)

FIG. 3

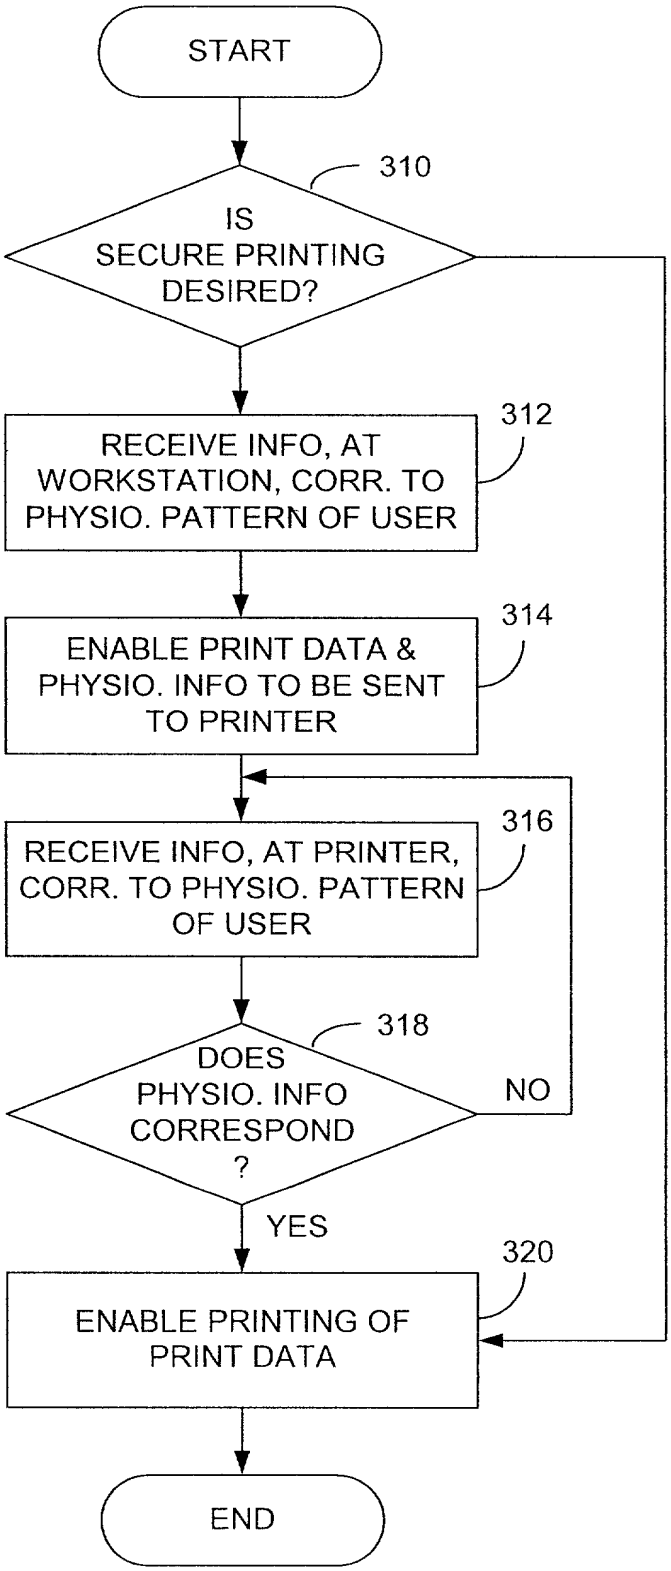
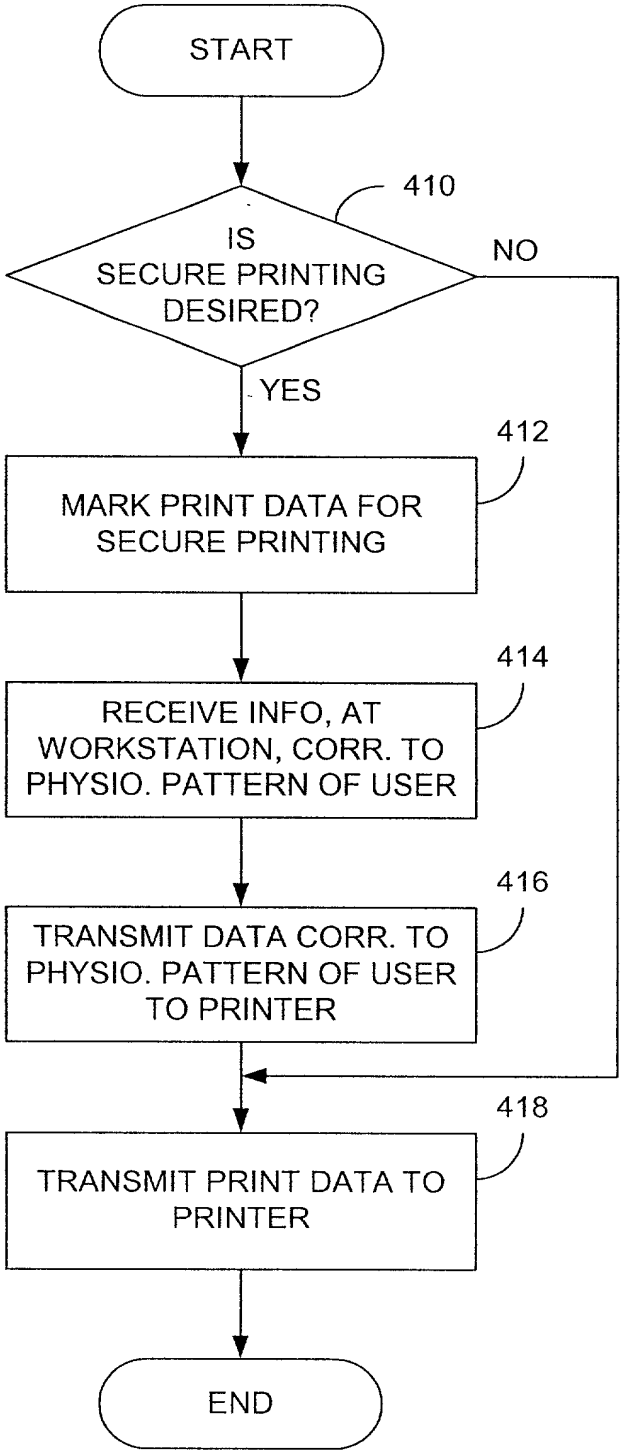

START
310
IS SECURE PRINTING DESIRED?
312
RECEIVE INFO, AT WORKSTATION, CORR. TO PHYSIO. PATTERN OF USER
314
ENABLE PRINT DATA & PHYSIO. INFO TO BE SENT TO PRINTER
316
RECEIVE INFO, AT PRINTER, CORR. TO PHYSIO. PATTERN OF USER
318
DOES PHYSIO. INFO CORRESPOND ?
NO
YES
320
ENABLE PRINTING OF PRINT DATA
END

FIG. 4


START
410
IS SECURE PRINTING DESIRED?
NO
YES
412
MARK PRINT DATA FOR SECURE PRINTING
414
RECEIVE INFO, AT WORKSTATION, CORR. TO PHYSIO. PATTERN OF USER
416
TRANSMIT DATA CORR. TO PHYSIO. PATTERN OF USER TO PRINTER
418
TRANSMIT PRINT DATA TO PRINTER
END

DUDETT 5408260

FIG. 5

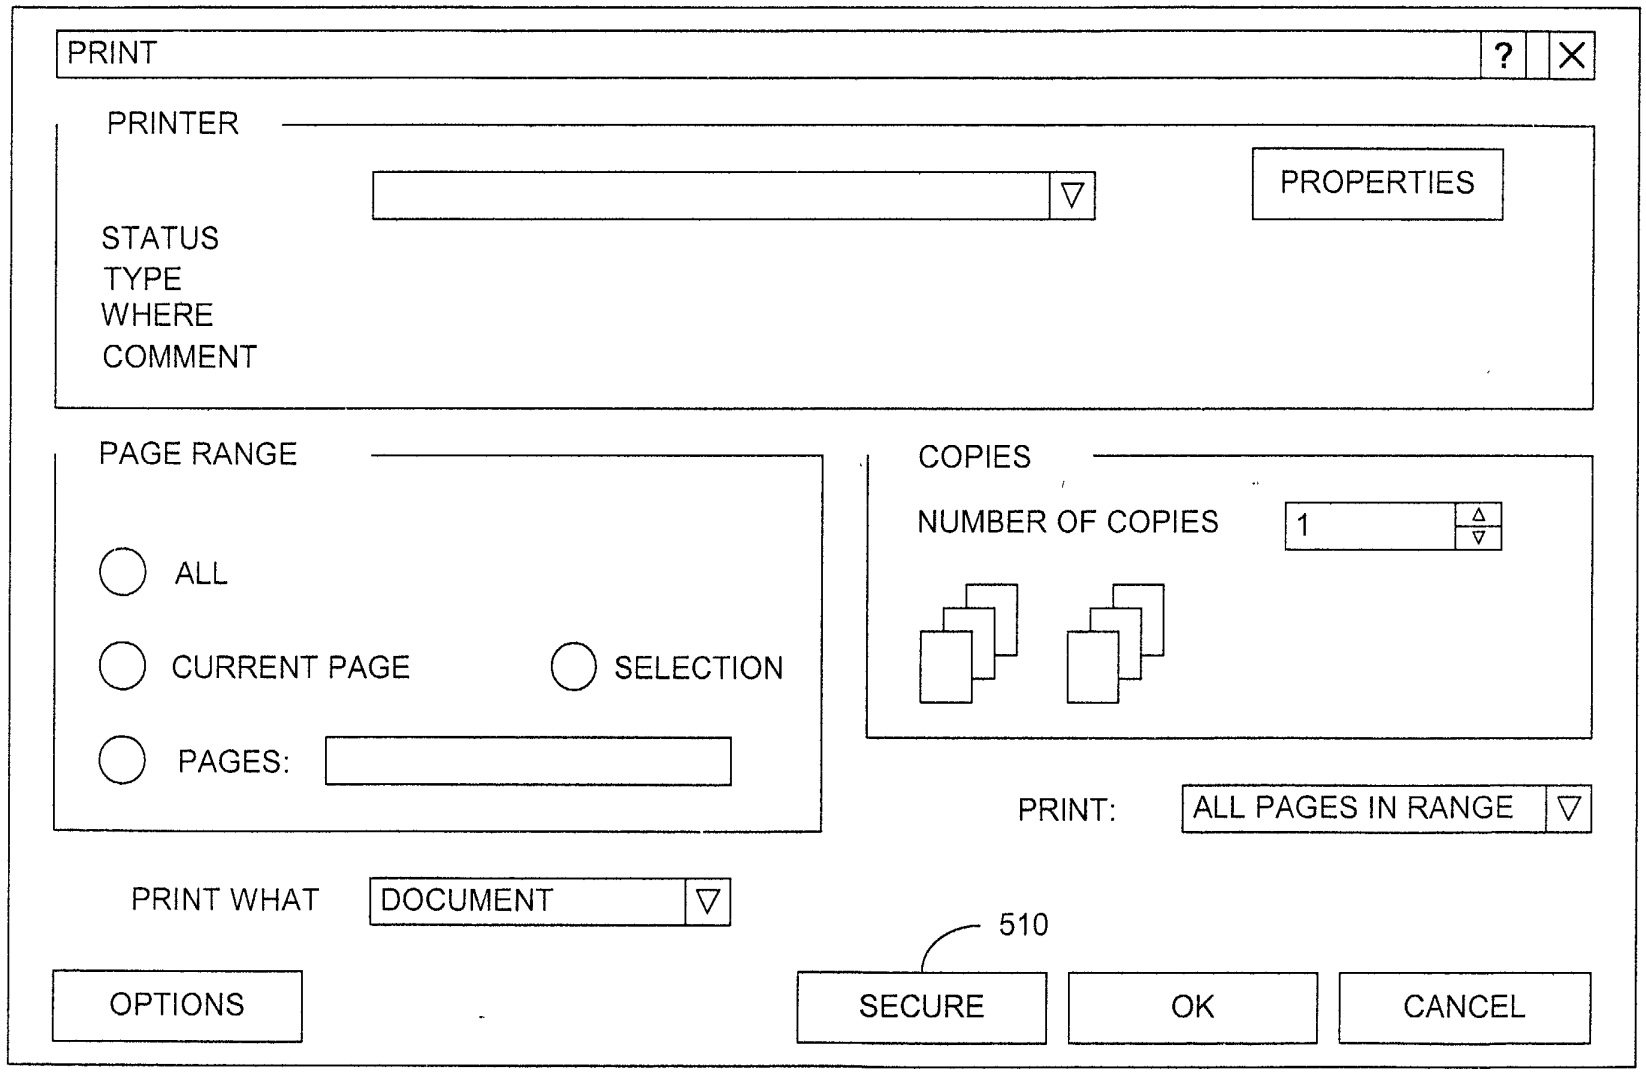
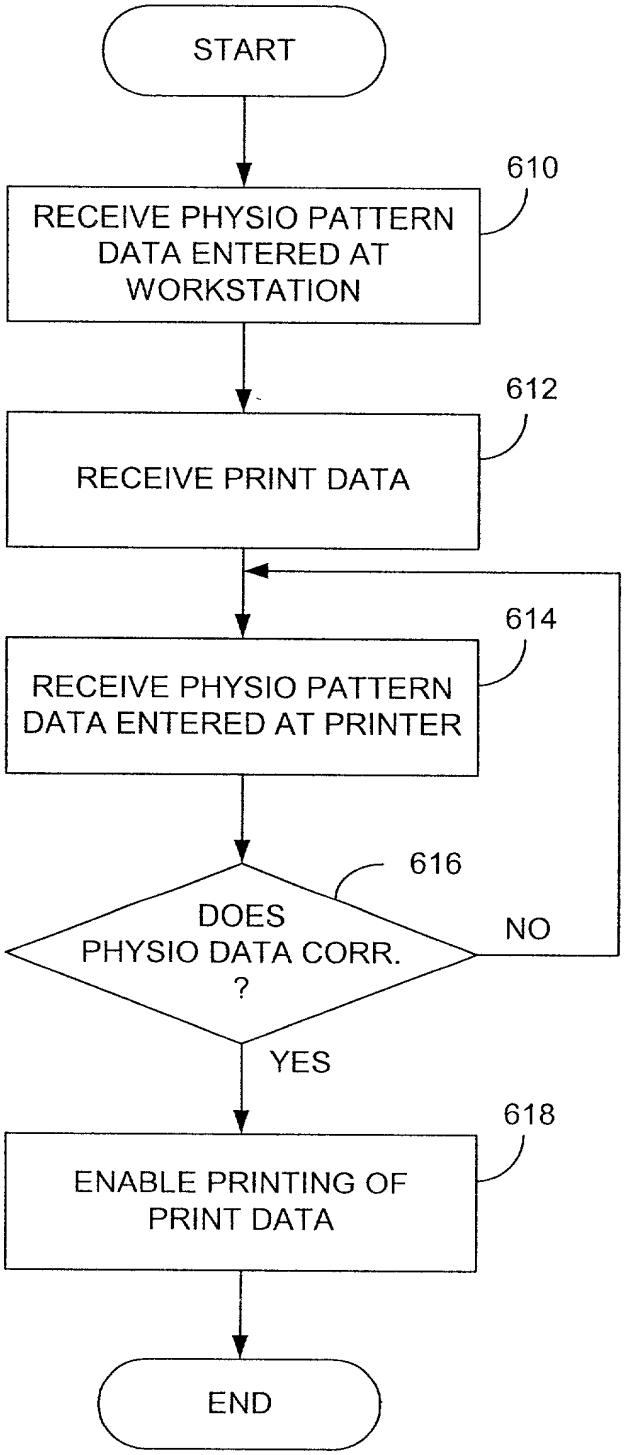


FIG. 6


START
610
RECEIVE PHYSIO PATTERN DATA ENTERED AT WORKSTATION
612
RECEIVE PRINT DATA
614
RECEIVE PHYSIO PATTERN DATA ENTERED AT PRINTER
616
DOES PHYSIO DATA CORR. ?
NO
YES
618
ENABLE PRINTING OF PRINT DATA
END